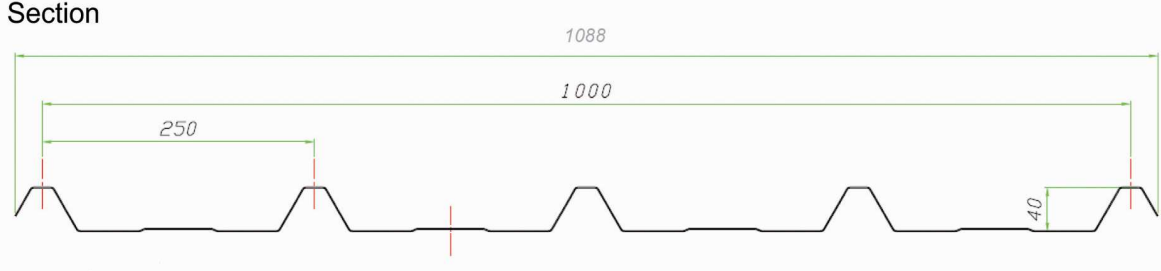
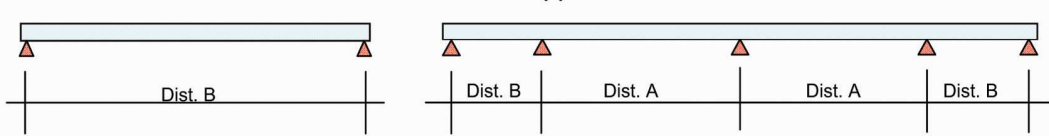


## GMPOLICARBONATO CORRUGADO 40/250

<b>40/250/1088</b>								
<p>Section</p> 								
THICKNESSES	1.0 mm							
WEIGHT	1.45 kg/m <sup>2</sup>							
WIDTH	<table border="1" style="width: 100%;"> <tr> <td style="text-align: center;">Nominal (Sheet max) 1.088 mm</td> <td style="text-align: center;">Useable 1.000 mm</td> </tr> </table>	Nominal (Sheet max) 1.088 mm	Useable 1.000 mm					
Nominal (Sheet max) 1.088 mm	Useable 1.000 mm							
STANDARD LENGTH	6.000 mm							
AVAILABLE COLOURS	Clear Opal							
THERMAL EXPANSION	0.065 mm/m °C (6.5 x 10 <sup>-5</sup> 1/°C)							
MINIMUM BENDING RADIUS	9.000 mm							
MINIMUM SLOPE	5%							
RECOMMENDED FIXING	Self-drilling 6.3x80mm with EPDM gasket (every 250 mm) Self-tapping for wood 6.5x100mm with EPDM gasket (max every 250 mm) Seaming plug (max every 300 mm)							
FOAMED PE CLOSURE STRIP	Not available							
<p>✓ <b>MAXIMUM ALLOWABLE LOADING VALUES (*) FOR EVENLY DISTRIBUTED LOADS</b></p> 								
Thickness mm	<b>Distance A</b>				<b>Distance B</b>			
	600 N/m <sup>2</sup>	900 N/m <sup>2</sup>	1.200 N/m <sup>2</sup>	1.500 N/m <sup>2</sup>	600 N/m <sup>2</sup>	900 N/m <sup>2</sup>	1.200 N/m <sup>2</sup>	1.500 N/m <sup>2</sup>
0.8	1.500	1.350	1.250	1.150	1.200	1.050	1.000	950
1.3	1.550	1.400	1.350	1.250	1.250	1.150	1.050	1.000
(*) Values are give using a safety coefficient of 1.5								
<b>Standard production</b>								