


GMPOLICARBONATO CORRUGADO MINIONDA


18/76/1265

Section

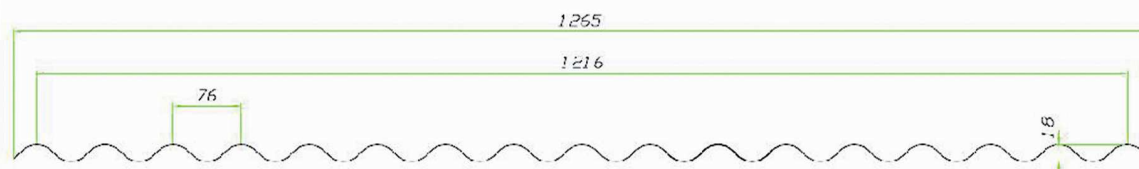

THICKNESSES	0.8 mm		
WEIGHT	1.10 kg/m²		
WIDTH	Nominal (Sheet max)	Useable	
	1.265 mm		1.216 mm
STANDARD LENGTH	6.000 mm		
AVAILABLE COLOURS	Clear <i>Opal</i>		
THERMAL EXPANSION	0.065 mm/m °C (6.5 x 10 ⁻⁵ 1/°C)		
MINIMUM BENDING RADIUS	4.000 mm		
MINIMUM SLOPE	5%		
RECOMMENDED FIXING	Self-drilling 6.3x60 mm with EPDM gasket (max every 300 mm) Self-tapping for wood 6.5x60mm with EPDM gasket (max every 300 mm) Seaming plug (max every 300 mm)		
CLOSURE STRIP	Available in 988 mm bars		

✓ **MAXIMUM ALLOWABLE LOADING VALUES (*) FOR EVENLY DISTRIBUTED LOADS**



Thickness mm	Distance A				Distance B			
	600 N/m ²	900 N/m ²	1.200 N/m ²	1.500 N/m ²	600 N/m ²	900 N/m ²	1.200 N/m ²	1.500 N/m ²
0.8	1.000	900	850	800	800	700	650	650
1.0	1.050	950	900	850	850	750	700	650
1.1	1.100	1.000	900	850	850	800	750	700

(*) Values are given using a safety coefficient of 1.5

Standard production